
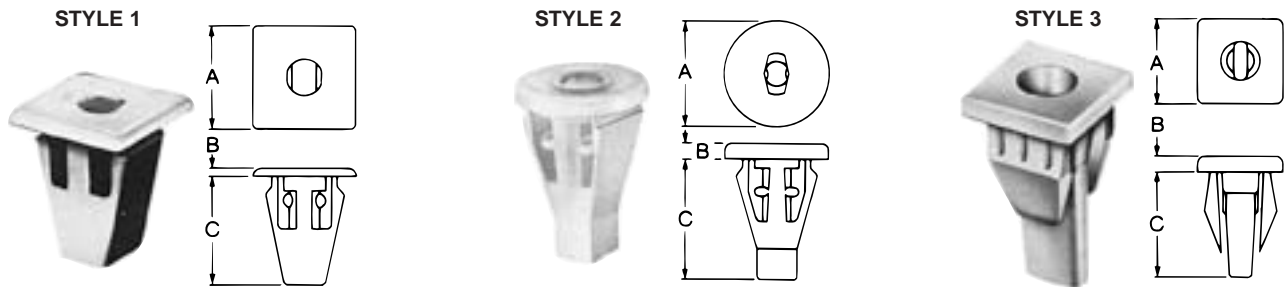


# PANEL FASTENERS/SCREW GROMMETS

## ENCLOZ® SCREW GROMMETS

Front mounted grommets provide added thread engagement, increased bearing area. Non-conductive parts fully encapsulate metal screws, providing electrical insulation and protecting against temperature/moisture transfer and exposed screw points.

Accommodates variations in hole size and panel thicknesses. Available in three basic styles. Styles 1, 2 and 3 function in panels ranging from .020 inch to .140 inch thick, and all accept a No. 8 screw. Style 3 accepts either a No. 8 or No. 10 screw.

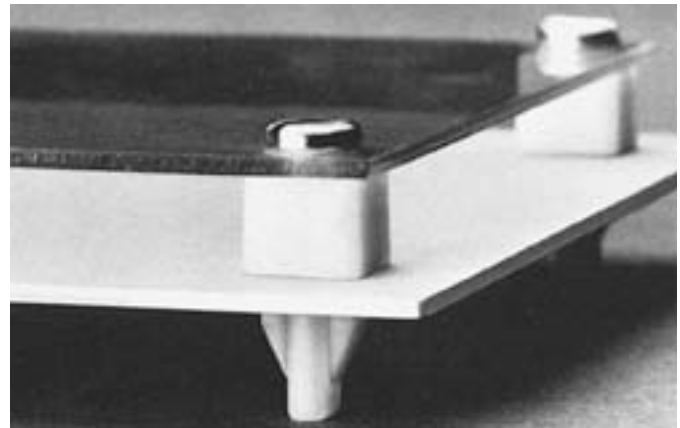

PART NUMBER	STYLE	PANEL HOLE SIZE*	PANEL THICKNESS RANGE	SCREW SIZE	HEAD SIZE A	HEAD HEIGHT B	PRONG LENGTH C
217-180202-01	1	.270-.286 SQ.	.030-.055	8	.435-.459 SQ.	.040-.050	.455-.475
217-200202-03	2	.312-.317 SQ.	.035-.060	8	.495-.505 DIA.	.120-.130	.620-.640
217-180302-00	3	.275 x .330 RECT.	.100-.110	8 or 10	.370-.390 SQ.	.026-.036	.465-.475
217-180502-22	3	.265-.280 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.115-.135	.450-.490
217-180502-24	3	.265-.280 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.240-.260	.460-.480
217-180502-26	3	.265-.280 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.365-.385	.450-.490
217-180502-35	3	.270-.272 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.021-.040	.450-.490
217-180502-04	3	.275-.290 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.240-.260	.450-.490
217-180502-05	3	.275-.290 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.302-.322	.450-.490
217-180502-06	3	.275-.290 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.365-.385	.450-.490
217-180502-08	3	.275-.290 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.490-.510	.450-.490
217-180502-10	3	.275-.290 SQ.	.020-.140	8 or 10	.427-.447 DIA.	.740-.760	.450-.490
217-200502-06	3	.309-.315 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.375-.385	.460-.480
217-200502-08	3	.309-.315 SQ.	.020-.140	8 or 10	.370-.390 SQ.	.490-.510	.460-.480
217-200502-00	3	.312-.317 SQ.	.020-.140	8 or 10	.865-.885 SQ.	.052-.072	.610-.640

**NOTE: Dimensions listed are nominal.**