


PANEL FASTENERS/PLASTIC RIVETS

PLASTI-RIVETS®

THREE AND FOUR PRONG, NON PRE-DRIVEN

Wide variety of styles and sizes to accommodate different materials and panel thicknesses. Functional head styles provide panel spacing, flush mounting, load distribution or appearance requirements. Tapered prongs snap positively into fastening hole and expand to hold securely as pin is driven.

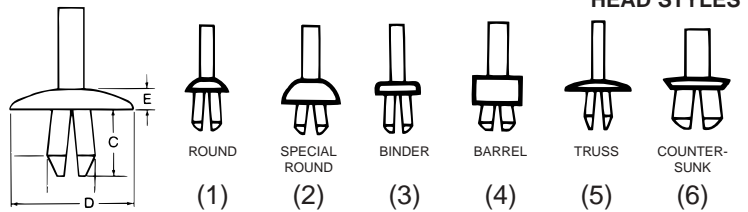



PART NUMBER	NOM. HOLE DIA.	PANEL THICKNESS RANGE	PRONG LENGTH C (REF.)	HEAD STYLE	HEAD DIA. D	HEAD HT. E
201-100841-00	.156	.187-.250	.293-.323	(3)	.218	.050
231-101041-00	.156	.218-.312	.355-.385	(3)	.375	.050
201-120541-00	.187	.062-.156	.198-.228	(4)	.375	.125
* 201-120741-00	.187	.062-.218	.280-.310	(3)	.438	.075
201-120741-01	.187	.062-.218	.280-.310	(5)	.320	.075
201-120751-00	.187	.062-.218	.280-.310	(1)	.281	.075
201-121041-00	.187	.156-.281	.376-.406	(3)	.437	.075
226-120501-02	.190	.031-.125	.212	(4)	.312	.031

PART NUMBER	NOM. HOLE DIA.	PANEL THICKNESS RANGE	PRONG LENGTH C (REF.)	HEAD STYLE	HEAD DIA. D	HEAD HT. E
201-121541-00	.190	.312-.440	.519-.549	(3)	.281	.078
231-121741-00	.190	.375-.500	.603-.613	(3)	.437	.075
* 201-161241-00	.250	.060-.250	.351-.381	(3)	.437	.187
231-250603-00	.250	.120-.200	.560	N/A	.700	.100
201-161341-00	.250	.125-.375	.469-.499	(3)	.437	.080
* 201-161751-00	.250	.281-.500	.610-.640	(1)	.375	.110
201-180401-00	.272	.031-.109	.175-.205	(4)	.375	.312
226-160501-01	.272	.031-.140	.224	(4)	.406	.046
201-181141-00	.281	.134-.320	.453-.483	(3)	.625	.109

Hole size may vary with panel range. Contact Fastex for a blueprint.

*Also offered pre-driven – use 231 prefix to order.

NOTE: Dimensions listed are nominal.

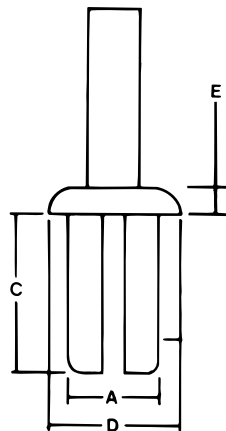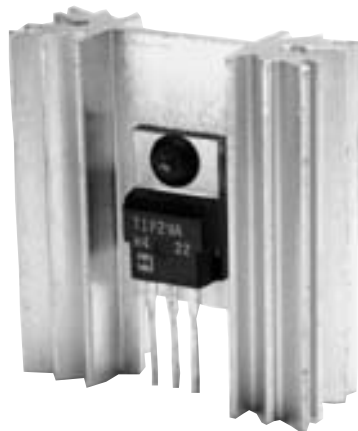

PLASTI-RIVETS®

TWO PRONG PRE-DRIVEN

PART NUMBER	NOM. HOLE DIA.	PANEL THICKNESS RANGE	PRONG LENGTH C (REF.)	HEAD STYLE	HEAD DIA. D	HEAD HT. E
231-080551-00	.125	.031-.140	.182-.212	(1)	.187	.045
231-080551-05	.125	.031-.140	.210-.240	(1)	.218	.060
231-090741-00	.136	.040-.218	.266-.296	(3)	.220	.050
231-100841-01	.156	.040-.250	.297-.327	(3)	.230	.050
231-121041-02	.188	.040-.375	.396-.416	(2)	.281	.062
231-141141-01	.218	.040-.400	.422-.452	(3)	.344	.062
231-161341-03	.250	.040-.462	.490-.510	(3)	.437	.080

Hole size may vary with panel range. Contact Fastex for a blueprint.

NOTE: Dimensions listed are nominal.

TUFLOK®

The Tuflok is a one-piece fastener with a pre-driven pin that is quickly installed by hand or with automatic equipment. It is ideally suited for any application requiring a front-mounted, removable, reusable push-type plastic rivet where a dependable vibration-resistant panel fastener is essential.

PART NUMBER	HOLE DIAMETER	PANEL RANGE	PARTS DIMENSIONS				HEAD STYLE	SPECIAL FEATURES	NO. LEGS	PIN STYLE	PRONG STYLE
			A	B	C	D					
M31-0500-01	.193-.205	.059-.181	.083	.283	.039	.445	Round	9.5 mm Pin Hd	3	D	CLOSED
M30-0600-03	.236-.244	.197-.236	.049	.669	.098	.709	Round	10 mm Shoulder	2	E	CLOSED
M30-0630-01	.248-.276	.098-.350	.138	1.000	.098	.898	Round	—	2	A	CLOSED
M30-0630-08	.244-.262	.060-.228	.098	.700	.098	.559	Round	—	2	A	OPEN
M30-0630-11	.248-.276	.220-.433	.118	1.000	.079	1.122	Round	Hole Finder	2	D	CLOSED
M30-0630-14	.250-.276	.098-.315	.118	.590	.079	.897	Round	—	2	A	CLOSED
M30-0800-16	.315-.325	.118-.315	.091	.591	.106	.787	Round	—	2	A	CLOSED

NOTE: Dimensions listed are nominal.