



Card Guides



UST's high quality precision molded card guides are available in all standard sizes 2 1/2" to 8 1/2".

Available in 3 UL Rated material types:

- Nylon 6/6 (Natural color)
- Flame retardant nylon 6/6 94V-O (Off-White)
- Static dissipative Nylon 6/6 (See table below for dimensions.)

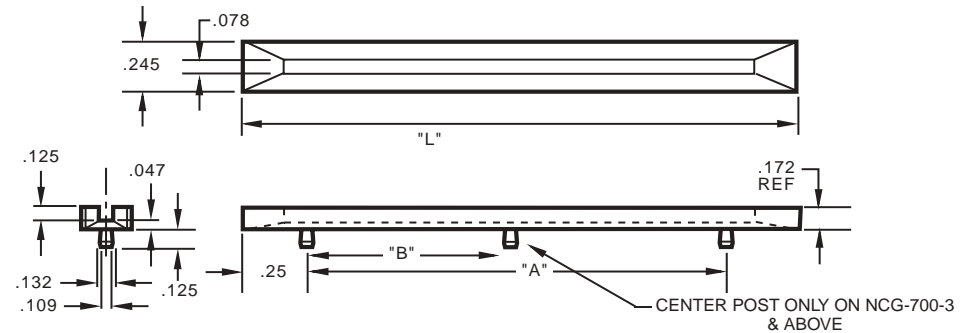

Nylon 6/6 Natural and Flame Retardent Nylon 6/6

Part No.	L ± .030" (.76)	A ± .024" (.61)
NCG-250-2	2.6" (63.5)	2.0" (50.8)
NCG-300-2	3.0" (76.0)	2.5" (63.5)
NCG-350-2	3.5" (88.9)	3.0" (76.2)
NCG-400-2	4.0" (101.6)	3.5" (88.9)
NCG-450-2	4.5" (114.3)	4.0" (101.6)
NCG-500-2	5.0" (127.0)	4.5" (114.3)
NCG-550-2	5.5" (139.7)	5.0" (127.0)
NCG-600-2	6.0" (152.4)	5.5" (139.7)
NCG-650-2	6.5" (165.1)	6.0" (152.4)

Part No.	L ± .030" (.76)	A ± .024" (.61)	B ± .016" (.41)
NCG-700-2	7.0" (177.8)	6.5" (165.1)	
NCG-700-3	7.0" (177.8)	6.5" (165.1)	3.25" (82.5)
NCG-750-2	7.5" (190.5)	7.0" (177.8)	
NCG-750-3	7.5" (190.5)	7.0" (177.8)	3.5" (88.9)
NCG-800-2	8.0" (203.2)	7.5" (190.5)	
NCG-800-3	8.0" (203.2)	7.5" (190.5)	3.75" (95.2)
NCG-850-2	8.5" (215.9)	8.0" (203.2)	
NCG-850-3	8.5" (215.9)	8.0" (203.2)	4.00" (101.6)

Anti-Static Card Guide

Part No.	A ± .030" (.76)	L ± .024" (.61)
ASG-250	2.020" (51.3)	2.532 (64.3)
ASG-300	2.520 (64)	3.032 (77)
ASG-350	3.020 (76.7)	3.532 (89.7)
ASG-400	3.520 (89.4)	4.032 (102.4)
ASG-450	4.202 (102.1)	4.532 (115.1)
ASG-500	4.520 (114.8)	5.032 (127.8)
ASG-550	5.020 (127.5)	5.532 (165.9)
ASG-600	5.520 (140.2)	6.032 (153.2)
ASG-650	6.020 (152.9)	6.532 (165.9)
ASG-700	6.520 (165.5)	7.032 (178.6)
ASG-750	7.020 (178.3)	7.532 (191.3)
ASG-800	7.520 (191)	8.032 (204)
ASG-850	8.000 (203.7)	8.532 (216.7)