



# PUSH-ON NUT FORM

These stud or shaft retainers engage an unthreaded stud or shaft on two sides. Notched springs deflect to encompass the stud as the retainer is pushed on, setting up a strong strut action that resists any back-off pressure. To accommodate varying space requirements, both round and rectangular push-on nuts are available.

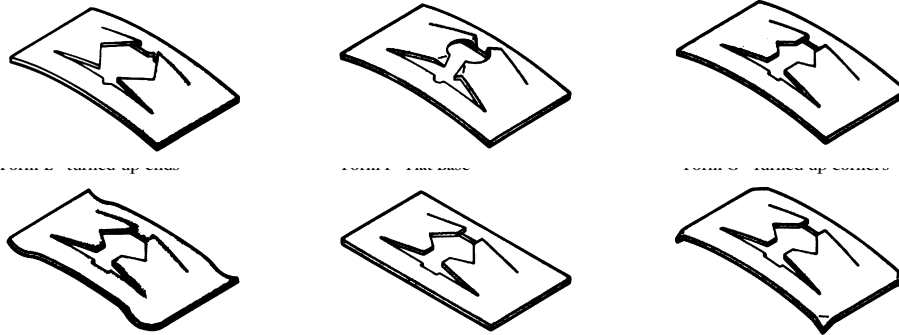

## ROUND PUSH-ON NUTS

STUD SIZE	WCL PRODUCT NUMBER	FORM*						DIAMETER	WIDTH	METAL THICKNESS
		A	B	C	D	E	F			
.050	PO-659150-1 <sup>1</sup>	•			•			3/8	11/32	.012
1/16	PO-658947-1 <sup>2</sup>	•			•			1/2	—	.012
3/32	PO-659151-1 <sup>1</sup>	•			•			3/8	11/32	.012
3/32	PO-655125-1	•	•					3/8	11/32	.012
.102	PO-655100-1	•						9/32	—	.012
.107	PO-655920-1	•	•					3/8	11/32	.012
.122	PO-655950-1	•	•					3/8	11/32	.012
1/8	PO-656000-1	•	•					3/8	11/32	.012
1/8	PO-656010-1	•	•					1/2	—	.018
.148	PO-656005-1	•	•					3/8	11/32	.012
.152	PO-656250-1	•	•					3/8	11/32	.012
5/32	PO-656015-1 <sup>3,4</sup>						•	5/16	—	.012
.164	PO-656300-1	•	•					3/8	11/32	.012
.175	PO-656325-1	•	•					9/16	—	.012
3/16	PO-656440-1	•	•					1/2	—	.012
3/16	PO-656442-1	•	•					1/2	—	.015
7/32	PO-656800-1	•	•					1/2	—	.012
.225	PO-656450-1	•	•					9/16	—	.018
.235	PO-656850-1	•	•					9/16	7/16	.012
1/4	PO-656900-1	•	•					9/16	—	.012
1/4	PO-656910-1	•	•					13/16	9/16	.022
9/32	PO-657000-1	•	•				•	7/8	—	.022
5/16	PO-657075-1	•		•				3/4	5/8	.018
5/16	PO-657027-1	•	•				•	7/8	—	.012
5/16	PO-657029-1	•	•				•	7/8	—	.018
11/32	PO-657100-1 <sup>3</sup>	•	•				•	7/8	—	.018
3/8	PO-659149-1	•	•				•	7/8	—	.018
.472	PO-659460-1	•		•				29/32	5/8	.012

Notes: 1.Also fits rectangular stud size .050 x .200  
2.Also fits rectangular stud size 3/64 x 3/16

3.Special; request blueprint  
4.Spherical shape