




ELECTRICAL/ELECTRONIC COMPONENTS

REVERSE EDGE-MOUNT STAND-OFF

Snaps into PC board from bottom. Support does not rotate in chassis and positioning holes. Locking arm clips to the side of board making removal and replacement of PC boards easy. Helps decrease service time. Available in a wide variety of UL recognized materials.

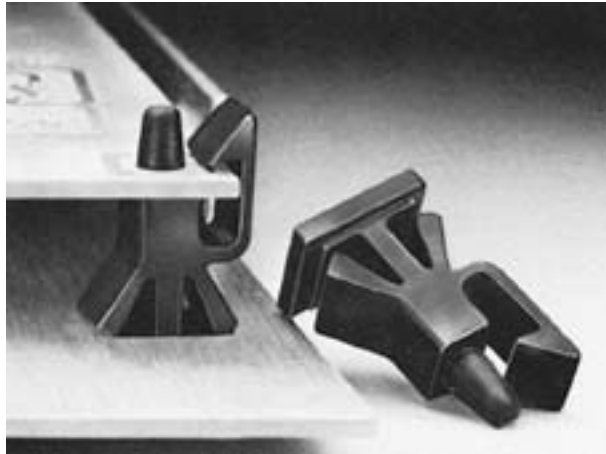

PART NUMBER	A	BOARD CLEARANCE B*	C	D	CIRCUIT BOARD		CHASSIS		HOLE PREPARATION	
					THICKNESS	HOLE DIA. E	THICKNESS	HOLE SIZE	F	G
275-100423-00	.235	.292-.322	.070	.200	.062	.156	.050-.060	.312 x .375	.200	.200
275-100423-01	.230	.430-.460	.070	.200	.062	.157	.050-.060	.312 x .375	.200	.200

*Board clearance may vary depending on chassis thickness. Dimensions shown are nominal except where a minimum-maximum range is given.

NOTE: Dimensions listed are nominal.

SAMPLES SERVICE



To request a sample of any of our products to evaluate before ordering, please call us toll free at **1-800-331-3816**, or visit our web site www.wclco.com